

IMPORTANT - PLEASE READ BEFORE INSTALLATION

- Once mounted on glass, this antenna is rugged and durable
- Extra care is to be taken when handling this antenna before and during installation
- Do not flex excessively during removal of backing paper and white tab
- Take care in planning the position of your antenna, once mounted the antenna cannot be removed without damage
- This antenna is not compatible on windscreens with any aftermarket tinting with metallic film


PLEASE NOTE: THIS ANTENNA WILL NOT FUNCTION CORRECTLY UNLESS IT IS MOUNTED ONTO A GLASS SURFACE

INSTALLATION PROCEDURE


Follow the instructions carefully as once the antenna is installed it cannot be removed without damage

- This antenna is designed to be installed on the inside of the windscreen
- Position the socket (on the antenna) adjacent to the windscreen edge (Do not remove the paper backing yet)
- If mounted on the rear windscreen it is important that it is mounted vertically as shown in the diagram below, as the horizontal demister wires will otherwise interfere with the radiation pattern
- Once you have determined the best position for the antenna fit the cable in its position. Do not apply the antenna to the window until the cable is routed in the windscreen trim. It must be routed from the selected windscreen position to the radio
- If mounted on the side of the window a minimum clearance of 150mm is required from the edge as shown in the below diagram
- Clean the windscreen with the supplied alcohol wipe
- Remove the paper backing from the antenna and apply the antenna to the windscreen. Be mindful in removing any air bubbles
- Connect antenna to the cable connector. The connector can be swiveled in the direction of the cable run
- Removing the antenna after it has been mounted can result in damage to the antenna

Front or Rear Windscreen

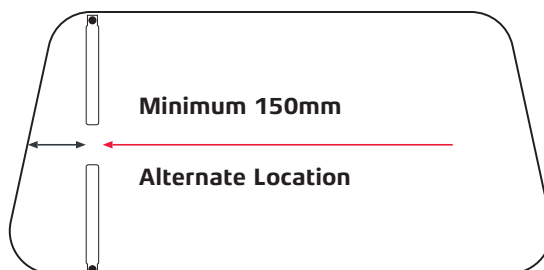

Passenger Side

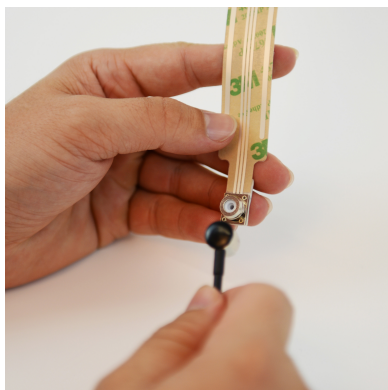

gme.net.au

Standard Communications Pty Ltd trading as GME.

P/N: 310701 D/N: 51020-1